

DIESEL RANGER TRAILER UNIT

ON-FARM | ON-ROAD
2000L / 2500L / 3000L

PRODUCT SPECIFICATION SHEET



Note: Spare wheel available as an optional extra

UNIT SPECIFICATIONS

Item	Description	Details
Tank	2000L - 3000L	Tanks manufactured from specifically formulated diesel grade polyethylene meeting ECE R34.01 & AS 1940-2004, AS 2809.2-2008 requirements. 15 Year full replacement warranty.
Pump	High Flow Pump	120L/min 1 Year warranty
Motor	Honda GX35	4-stroke single cylinder OHC petrol engine
Hose	Delivery	6 metres of 25mm anti-static delivery hose with anti-kink spring
	Suction	2 metres of 25mm suction hose
Filler Cap		Pad lockable filler cap with strainer and safety chain. #50 mesh filter
Breather		Specifically designed splash resistant breather
Nozzle	ADGA25	1" auto shut-off fuel dispensing nozzle
Ports		1" threaded BSP ports
Power Source	12V	4m of electrical cable with battery clips and fuse
Filtration	Three stage	Lid strainer, foot filter and pump strainer
Drain	Bung	¾" drain bung
Earth Lead	Anti-static	4m anti-static earth lead
Ball Baffles	ARB355F x 25	Ball Baffle System for stability (fitted)
Mounting	Galvanised Pins	4 x galvanised mounting pins

DIESEL RANGER TRAILER UNIT

ON-FARM | ON-ROAD
2000L / 2500L / 3000L

PRODUCT SPECIFICATION SHEET




DUAL AXLE TRAILER SPECIFICATIONS

TANK CAPACITY

Type	Farm	All sizes	Standard trailer - no lights, reflectors or brakes
	Road	All sizes	Fitted with LED lights, reflectors, brakes & compliance plate - to ADR standards
Chassis		All sizes	Fully welded RHS steel - hot dip galvanised, chequer plate mudguards
Running Gear	Axles	2000 & 2500L	Dual, 45mm square, mounted over 6 leaf springs
		3000L	Dual, 50mm square, mounted over 7 leaf springs
	Wheels	All sizes	15" x 7" steel rims, 6 stud Landcruiser hub pattern
	Tyres	All sizes	Brand new, All Terrain Light Truck, 6 ply radial tyres, 31 x 10.5 R15
Brakes	Electric	2000 & 2500L	Electrically operated 10" drum brakes with safety breakaway & handbrake
		3000L	Electrically operated 12" drum brakes with safety breakaway & handbrake
Towing		2000 & 2500L	50mm Ball Hitch, 7 pin flat trailer plug, safety chain (rated)
		3000L	70mm Ball Hitch, 7 pin flat trailer plug, safety chain (rated)
Aggregate Trailer Mass (AGM)		2000 & 2500L	3000kg
		3000L	4000kg

TRAILER DIMENSIONS (mm)

TANK CAPACITY	LENGTH	WIDTH	HEIGHT
2000L	5000	2150	1790
2500L	5000	2150	1850
3000L	5400	2150	1920

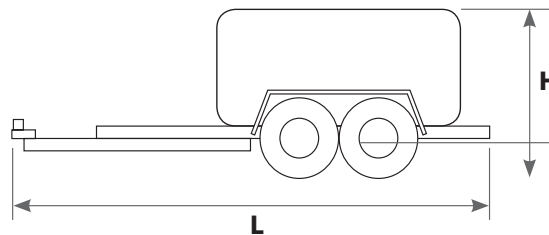

DIESEL RANGER TRAILER UNIT

ON-FARM | ON-ROAD
2000L / 2500L / 3000L

PRODUCT SPECIFICATION SHEET



UPGRADE OPTIONS

DIESEL FILTER HOLDER & CARTRIDGE KIT – ADC30M25F

- Aluminium filter holder supplied with water and sediment filter cartridge



DIGITAL FLOW METER 5 DIGIT – ADFPE25D5

- 5 digit easy to read LCD display powered by lithium battery (CR2)
- Fluid type: for diesel, kerosene and diesel exhaust fluid e.g. AdBlue™, NoNox®, Air1®
- Flow rate: 10-100LPM / 3-26 GPM
- Max operating pressure: 72psi / 5 bar
- Inlet/Outlet: 1"
- Fits all diesel units



DIESEL HOSE – ADZF6M20 / ADZF10M20 / ADZF6M25 / ADZF10M25

- Choose from 6 & 10m hose lengths (check pump compatibility if adding additional hose)
- Choose from ¾" and 1" hose diameter
- High quality diesel grade hose with crimped fittings
- Hose kinking prevented by anti-kink spring



HEAVY DUTY HOSE REEL – ADHR008M25

- 8m of 25mm hose
- ¾" BSP fittings
- Spring loaded retractable reel
- Heavy duty steel construction
- Hose feed guide with stopper
- 1" BSP swivel & inlet for increased flow
- Secure 4 point mounting
- Made in Italy



All options not necessarily compatible. Please contact us or your local dealer to clarify.

DIESEL RANGER TRAILER UNIT

ON-FARM | ON-ROAD
2000L / 2500L / 3000L

PRODUCT SPECIFICATION SHEET




UPGRADE OPTIONS

RING HITCHES



HEAVY DUTY JOCKEY WHEEL – CTJ008S



WHEEL CHOCKS



SPARE WHEEL & TYRE – AQWK015



POLY PUMP BOX



All options not necessarily compatible. Please contact us or your local dealer to clarify.